

Features:

A square profile offers increased stability in the groove

A defined sealing lip provides maximum performance

Easy to install

Available inch or metric sizes



MATERIAL

The 261 Series Static Seal features high-grade polyurethane. Standard materials are MP03 machined H-PU available up to 2100 mm in diameter. The 268 series includes a full face back up ring (material ML01) in addition to the 261 series seal.

Material	Code
Polyurethane H-PU	MP03
Nitrile NBR	MN01
Fluoroelastomer FPM	MF01

OPERATING PARAMETERS

Temperature	MP03	
	°C	°F
hydraulic oil	-20...+115	-5...+240
water oil emulsions (HFA)	+5...+55	+40...+130
water-glycol fluids (HFC)	-20...+55	-5...+130
polyol esters (HFD)	-	-
water	+5...+55	+40...+130
speed	0.5 m/s (1.6 ft/sec)	
pressure	≤1,380 bar (20,000b psi)	

Note: for other materials or fluids please contact our engineering department.

DESCRIPTION

The 261 Series is a great replacement for standard large-diameter O-rings. This heavy duty static seal has a defined sealing lip manufactured from high-performance polyurethane. The square body profile prevents rolling in the groove, which is common with O-rings. The robust qualities of polyurethane allow the seal to be used without a backup ring. It is a substantial upgrade to the traditional O-Ring and backup ring combination, which has been prone to rolling installation problems. The 268 series includes a full face back up ring in addition to the 261 series seal.

PRODUCT BENEFITS


- No twisting or rolling during installation
- Direct retrofit to O-Ring and backup ring designs
- Extrusion resistant
- Abrasion-resistant polyurethane

APPLICATIONS

The 261 Series is used as the primary static seal in heavy duty steel and aluminum applications in severe conditions.


Typical applications include:

- Steel and Aluminum Processing
- Mobile Hydraulics
- Hydraulic Cylinder Rebuild
- Agricultural Hydraulics
- Construction Equipment

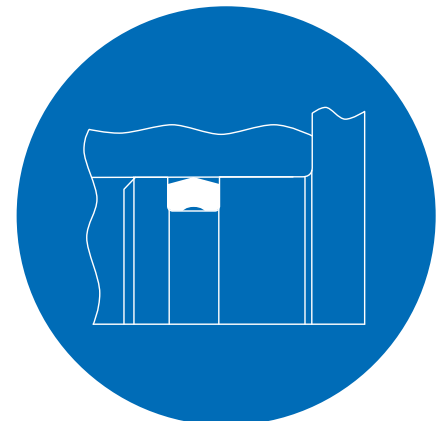

Above: Installation Drawing

DESIGN GUIDELINES

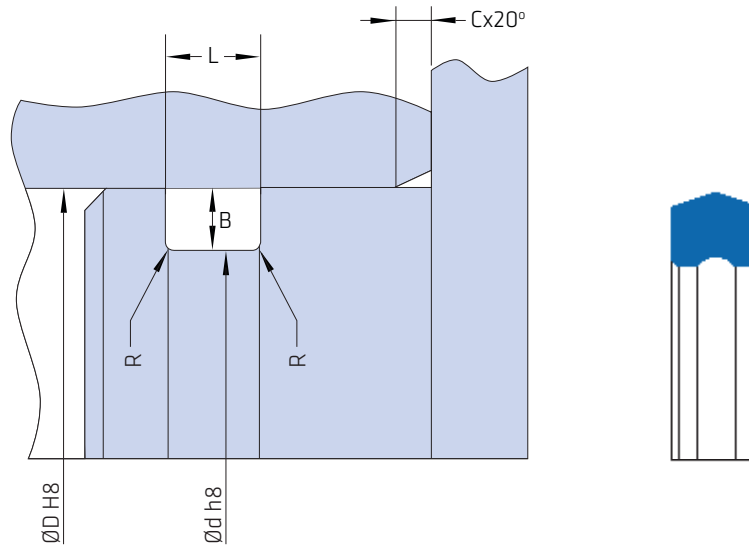

METRIC SERIES

	Groove Depth (B)	Groove Width (L)			Radius (R)		Chamfer (C)
		261 only	+1 backup ring	+2 backup rings	261 only	with backup ring	
		$B^{+0.05}$	$L^{+0.25}$	$L^{+0.25}$	$L^{+0.25}$	R	
Series 000	1.40 mm	2.40	3.80	5.20	0.30	0.30	2.50
Series 100	2.10 mm	3.60	5.00	6.40	0.30	0.30	3.00
Series 200	2.80 mm	4.80	6.20	7.60	0.60	0.40	3.50
Series 300	4.30 mm	7.10	9.00	10.90	1.00	0.60	5.00
Series 400	5.80 mm	9.50	12.30	15.10	1.00	0.60	5.00

INCH SERIES

	Groove Depth (B)	Groove Width (L)			Radius (R)		Chamfer (C)
		261 only	+1 backup ring	+2 backup rings	261 only	with backup ring	
		$B^{+0.002}$	$L^{+0.010}$	$L^{+0.010}$	$L^{+0.010}$	R	
Series 000	0.055 in	0.094	0.150	0.205	0.012	0.012	0.098
Series 100	0.083 in	0.142	0.197	0.252	0.012	0.012	0.118
Series 200	0.110 in	0.189	0.244	0.299	0.024	0.016	0.138
Series 300	0.169 in	0.280	0.354	0.429	0.039	0.024	0.197
Series 400	0.228 in	0.374	0.484	0.594	0.039	0.024	0.197

Note: for a complete list of available sizes please refer to the System Seals online product catalogue at www.systemseals.com.

SURFACE FINISH

Surface roughness	Ra	Rt	RMS
Sliding surface	$\leq 0.3 \mu\text{m}$	$\leq 3 \mu\text{m}$	8 RMS
Surface of groove I.D.	$\leq 1.8 \mu\text{m}$	$\leq 10 \mu\text{m}$	64 RMS
Sides of groove	$\leq 3 \mu\text{m}$	$\leq 16 \mu\text{m}$	125 RMS