


Modified Thermoplastic Polyurethane (TPU Injection Molded Grade)

SPECIFICATIONS

Property	Spec	Value
Hardness	DIN 53505	95A ±5
Hardness	DIN 53505	48D ±5
Density	DIN 53479	1.21 g/cm ³
Tensile Strength	DIN 53504	55 N/mm ²
Ultimate Elongation	DIN 53504	400%
20% Modulus	DIN 53504	6 N/mm ²
100% Modulus	DIN 53504	16 N/mm ²
300% Modulus	DIN 53504	35 N/mm ²
Tear Strength	DIN 53515	150 N/mm ²
Abrasion	DIN 53516	35mm ³
Compression Set 23C @ 70 Hrs	DIN 53517	22%
Compression Set 70C @ 24 Hrs	DIN 53517	35%
Brittle Point	DIN 53513	-40°C
Color		Red

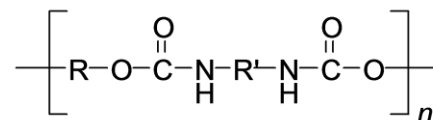

DESCRIPTION

MM43 is a TPU material with hardness 95A and 48D, specially compounded for injection molded applications. The polyurethane polymer industry has enormous categories of products for a wide variety of applications. Polyurethane used in the seal industry is a thermoplastic elastomer (TPU). As the name suggests, it behaves like an elastomer but the chemistry is of a thermoplastic. The elasticity of a TPU is brought about through polymer morphology phase changes as in thermoplastics not through vulcanization as seen in other elastomers. Because of its thermoplastic nature, TPU has excellent tensile strength and abrasion resistance that other elastomers are unable to match. Meanwhile, TPUs also have good flexibility and shock absorbing performance. An additional advantage of TPUs is that they can be molded using conventional thermoplastic processes.